



INSTALLATION INSTRUCTIONS

RH110-S-N-U-350

(FOR USE ONLY WITH LUMENTURE HL110 TRIM MODULE)

IMPORTANT

Read carefully before installing fixture. Retain instructions for future reference.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK.

WARNING: Make certain power is OFF before installing or maintaining fixture.

WARNING: Suitable for dry or damp locations only where the ambient temperature is 0°C/32°F minimum and 40°C/104°F maximum.


WARNING: Suitable for installation only in accessible ceilings. Access above ceiling is required.

WARNING: Do not install insulation within 76mm (3 in) of any part of the Luminaire.


ROUGH-IN MOUNTING

1. **Nailer Bars** are provided for use with wood joist installations. Insert Nailers Bars through slots in **Butterfly Brackets**, and secure them accordingly. C-channels are optionally available. Consult local building codes for fixture support requirements.
2. Remove appropriate **Knockout** on **Junction Box**. Press **Clip** to open Junction Box.
3. Feed supply wires through **Knockout** hole, and connect to driver. See wiring section for details.
4. Fixture can be adjusted to different heights above ceiling surface. For height adjustment, loosen **Wing Nut** (inside housing), and slide **Butterfly Bracket**.
5. Adjust both **Butterfly Brackets** so that frame of **Rough-In Section** is flush with finished ceiling surface. Tighten **Wing Nuts**.


(FIG. 1)

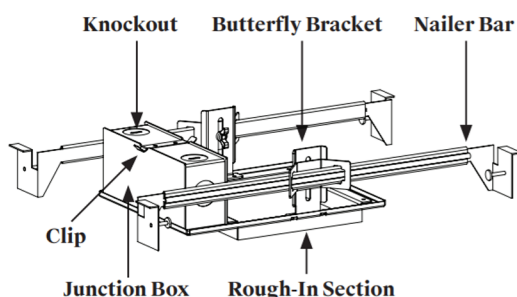

(FIG. 2)

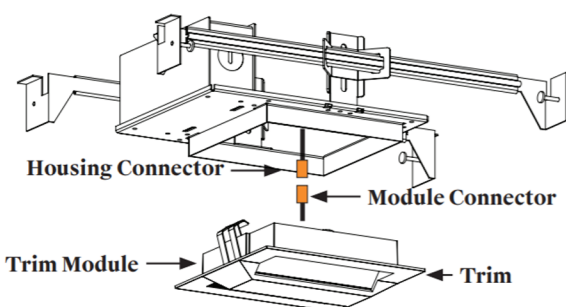


(FIG. 3)



(FIG. 4)

For 0-10V dimming



Thank you for buying Lumenture fixtures.
We welcome your feedback: info@lumenture.com.

