


LUMENTURE



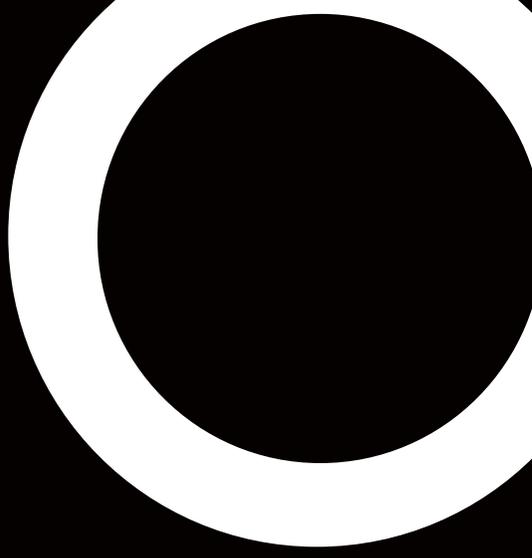

“Luminaire is consistently fantastic to work with. The team is knowledgeable, responsive, & solution oriented.”

This combined with high quality, competitively priced light fixtures with well-communicated, typically short lead times makes them a top go-to manufacturer for downlights, track heads, wall washers, and their KBeam™ track.”

Sales Representative Partner



WE LEAD THROUGH INNOVATION

From our industry-first track adapter with infinite rotation for effortless aiming to our K-Beam™ suspended track system – we invent superior solutions to lighting challenges.



WE ARE ENVIRONMENTALLY CONSCIOUS

We aim to reduce our carbon footprint through energy-efficient models, discreet form factors and innovative packaging.



WE PRIDE OURSELVES IN OUR SERVICE

We strive to be the easiest lighting manufacturer to do business with. Most of our products are in stock, ship on time and are within your budget.



WE FOLLOW A DISCIPLINED DESIGN PROCESS

Our process ensures that our products are both beautiful and functional. Sometimes “less is more.”

**compact.
powerful.
in stock.**



Seamlessly blending into any environment, our T-Series track cylinders reveal no visible hardware and have a **nested center arm** for

Our innovative patented Infinity Adapter™ is **50% smaller** than competitive adapters and has the unique ability to rotate continuously for **effortless aiming**.

TRACK CYLINDERS

dimming
as low
as 1%

Our threaded accessory holder ensures **zero light** leakage and allows **easy field replacement** of accessories, optics and multiple snoot designs.

Our designs offer broad dimmer compatibility with flicker-free Triac/ELV **dimming as low as 1%** on certain dimmers.




Light source
120V AC, 7W - 37W
120-277V AC (T95)
Up to 3500lm at 100lm/W

CCT/CRI
22K, 24K, 27K, 30K, 35K, 40K,
Dim-to-Warm, CRI 90+, 95+

Beam Spreads
7° 15° 22° 40° 60° WW°


Mounting Type
J-Type Track, G-Type Track, H-Type Track, L-Type
Track, S-Type Track, Micro Canopy, Slim Canopy,
Extension Stems



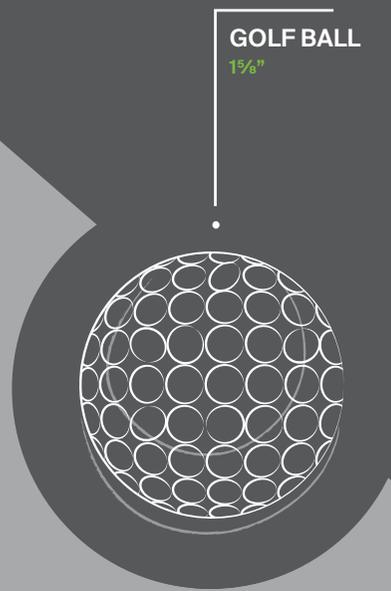

GOLF BALL

1 5/8"

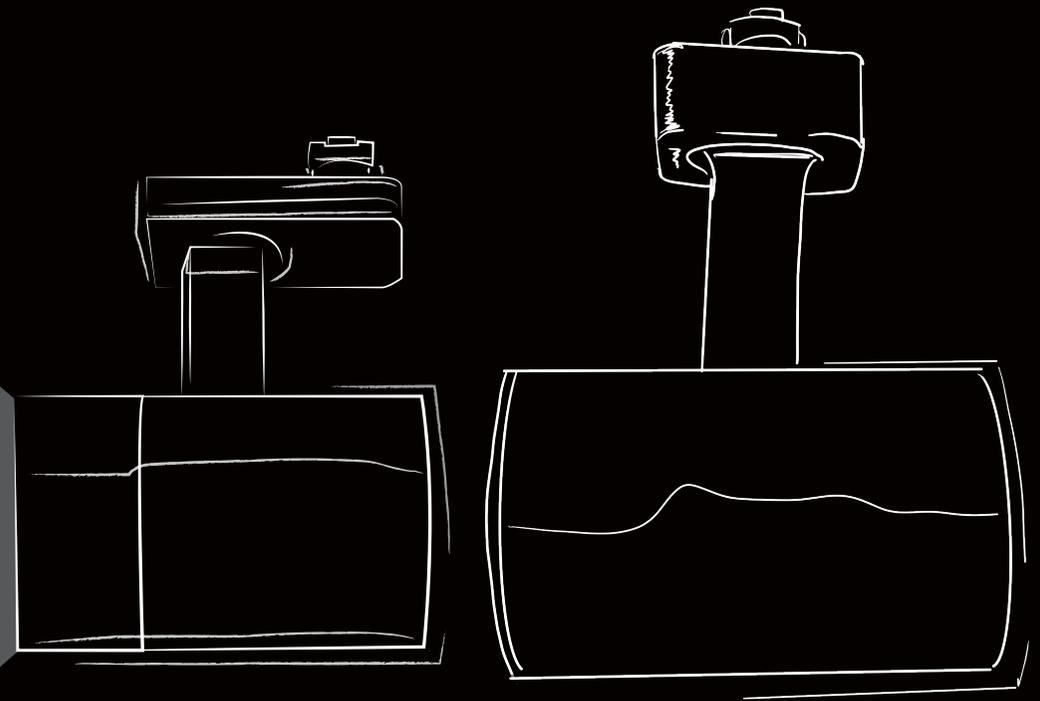

T40

Ø 1 5/8"

T50

Ø 2"

**up to 75% smaller
than competitive
adapters**

our smallest track fixture



T40
Ø 1 5/8"

The T40 is designed to blend **seamlessly** into a wide range of environments.



T40S
Ø 1 5/8"

The T40 comes standard with Lumenture's patent-pending, low-profile **Mini Adapter** with 2-Circuit functionality that is even smaller than our industry-leading Infinity Adapter™



Available in both round and square configurations, this mini track fixture is **flexible to your space** and designs.




Light source

120V AC, 7W
Up to 600lm @ 85lm/W

CCT/CRI

22K, 24K, 27K, 30K, 35K, 40K,
Dim-to-Warm, CRI 90+, 95+

Beam Spreads



Snoots




Mounting Type

J-Type Track, L-Type Track, G-Type,
S-Type, Micro Canopy, Slim Canopy

Finish



Louvers



Lenses



SPOT CANOPIES



virtually disappears

The slim canopy mounts directly over a standard junction box - resulting in an **elegant and clean** install of Lumenture's **award-winning** T-Series track fixtures.

With a minimal 2³/₄" trim, Lumenture's micro-canopy virtually "**disappears**" into the ceiling without requiring a junction box, offering an even **more refined look** for the most high-end applications. Extension stems available.



Fixture Compatibility
T40, T50, T65, T80, T95





V60
Ø 2 3/8"

The V60 is adaptable to a wide range of environments.



V75
Ø 3"

The V-Series is our value series track fixtures. If you're looking for lighting that has Lumenture quality within a tight budget, our V-Series Value fixtures are a great solution.



value
Series

Same great quality of Lumenture product, the V-Series is **budget friendly**.



Light source
120V AC, 12.5-20W
Up to 2000lm @ 100lm/W

CCT/CRI
27K, 30K, 35K, 40K
CRI 90+

Beam Spreads

 25° 40° 60°

Snoots


Mounting Type
J-Type Track, L-Type Track,
H-Type Track

Finish


Louvers


Lenses


	Output	Beam Spread	Mounting Type	Aperture
	T40 7W; up to 600lm	22°, 40°	J-Type, L- Type, H-Type, G-Type, S-Type, Slim Canopy, Micro Canopy	1.5"
	T50 14W; up to 1100lm	7°, 15°, 22°, 40°	J-Type, L- Type, H-Type, G-Type, S-Type, Slim Canopy, Micro Canopy, Extension Stems	2"
	T65 16W; up to 1650lm	15°, 25°, 40°, 60°	J-Type, L- Type, H-Type, G-Type, S-Type, Slim Canopy, Micro Canopy, Extension Stems	2.5"
	T80 20W; up to 2000lm	15°, 25°, 40°, 60°, Wall Wash	J-Type, L- Type, H-Type, G-Type, S-Type, Slim Canopy, Micro Canopy, Extension Stems	3"
	T95 37W; up to 3500lm	15°, 25°, 40°, 60°	J-Type, L- Type, H-Type, G-Type, S-Type, Slim Canopy, Extension Stems	3.75"
	V60 12W; up to 1250lm	25°, 40°, 60°	J-Type, L- Type, H-Type	2.4"
	V75 20W; up to 2000lm	25°, 40°, 60°	J-Type, L- Type, H-Type	3"



C70-220
Ø 2¾"
8¾" Length



C70-95
Ø 2¾"
3¾" Length



C95-220
Ø 3¾"
8¾" Length

Our Cylinder light fixtures provide a full-package lighting design solution. Delivering up to **4000 lumens (C95)** these fixtures pack the right amount of power into any space.

Available in different lengths, aperture's, and mounting types, Lumenture Cylinders adapt to your space - providing light where



CYLINDERS

Our threaded accessory holder ensures **zero light leakage** and allows **easy field replacement** of accessories and multiple snoot designs - including a glow ring for added flare.

Our designs offer broad dimmer compatibility with flicker-free Triac/ELV **dimming as low as 1%** and Dali/0-10v **as low as 0.1%** on certain dimmers.



Light source
120-277V AC, 6W - 46W
Up to 4000lm at 95lm/W

CCT/CRI
22K, 24K, 27K, 30K, 35K, 40K,
Dim-to-Warm, CRI 90+, 95+


Beam Spreads
15° 25° 40° 60°

Mounting Type
Surface Mounted, Pendant Mounted,
Track Mounted, Wall Mounted





C70-220 | Surface Mounted
Ø 2¾"
8⅝" Length

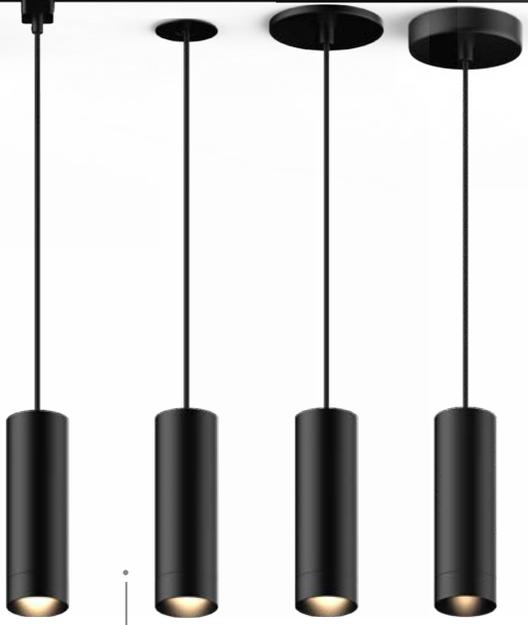

C70-220 | Track Mounted
Ø 2¾"
8⅝" Length

C70-220 | Pendant Mounted
Ø 2¾"
8⅝" Length



C95-220 | Surface Mounted
Ø 3¾"
8⅝" Length



C95-220 | Pendant Mounted
Ø 3¾"
8⅝" Length

C95-220 | Pendant Mounted
Ø 3¾"
8⅝" Length



C70-220 | Wall Mounted
Ø 2¾"
8⅝" Length



C70-95 | Surface Mounted
Ø 2¾"
3¾" Length



C70-95 | Pendant Mounted
Ø 2¾"
3¾" Length

TRACK WALL WASHERS

sleek,
discreet,
powerful.



A custom TIR lens enhances on-axis brightness, allowing each TWW to deliver **industry-leading efficiency** and performance. Plus, they both have the ability to tilt 180° in either direction, allowing for customization of any space.

TWW160



6 3/8"

TWW180



7 1/8"

Lumenture's Track Wall Washers are a mix of sleek, discreet and powerful, creating the **ultimate lighting powerhouse.**



Light source

120V AC, 17W (TWW160)
120V AC, 35W (TWW180)
Up to 4000lm @ 115lm/W (TWW180)

Mounting Type

J-Type, G-Type, H-Type, L-Type, S-Type,
Slim Canopy, Extension Stems


CCT/CRI

27K, 30K, 35K, 40K,
Dim-to-Warm, CRI 90+

Finish



Baffle



TRACK SYSTEMS

K-BEAM™

2-Circuit, 1-Neutral suspended track with our patented I-Beam design. Compatible with Lumenture and other J-Type track fixtures. Available in 4' or 8' length track (field-cuttable) in black or white.



ONE-CIRCUIT


1-Circuit, 1-Neutral track. Compatible with Lumenture and other J-Type track fixtures. Available in 4' and 8' lengths (field-cuttable) with black, white or silver finishes.



TWO-CIRCUIT

2-Circuit, 1-Neutral track. Compatible with Lumenture and other J-Type track fixtures. Available in 4' and 8' lengths (field-cuttable) with black or white finishes.

K-BEAM™ SUSPENDED TRACK SYSTEM

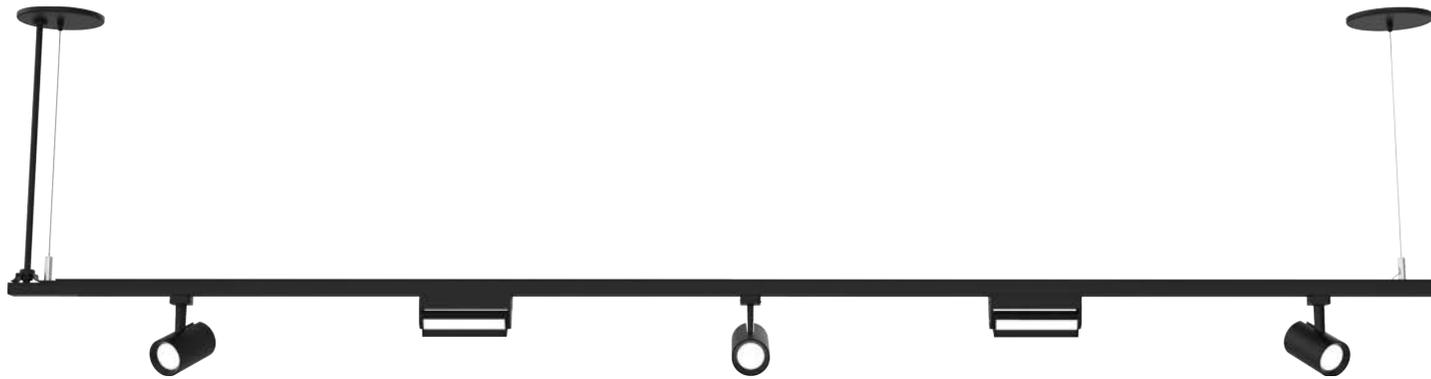

TRACK CONNECTORS

All connection accessories and power feeds are made of polycarbonate with galvanized steel back plates. Available in straight, 90°, T-connectors, and X-connectors.



I-BEAM CHANNEL

Our K-Beam™ features a patented I-Beam channel, designed to support more weight than traditional track and provide extra strength over long spans.




STABILIZING ROD

To further increase the system's stability and alignment, we include an optional stabilizing rod in each K-Beam™ suspension kit.



INSTALLATION SAVINGS

K-Beam™ eliminates the need for Unistrut or other expensive proprietary suspended track systems and reduces suspension points up to two-thirds, resulting in installation savings of 35% or more.

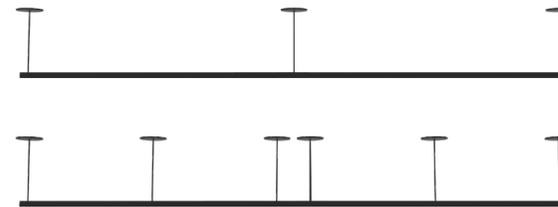


LONGER SUSPENSION

Reinforced K-Beam™ allows suspension on up to 8' centers and eliminates any sagging or tilt.

LIGHTING DESIGN FREEDOM

With its small form factor, K-Beam™ blends seamlessly into ceilings and comes standard with a two-circuit, one-neutral configuration that delivers greater lighting design flexibility.

HALLWAY LIGHTS

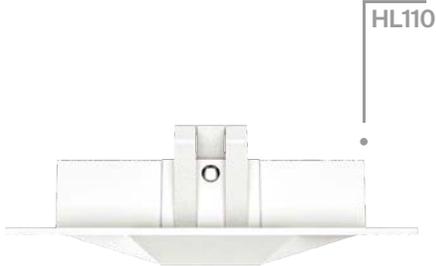


HL110



5 5/8"


Luminaire's patented HL110 directs light toward the walls - allowing you to increase perceived light levels and **reduce fixture counts**. The impressive performance comes in a discreet 5 5/8" form factor that **blends effortlessly into ceilings**.

Before HL110 using 26 standard 15W downlights

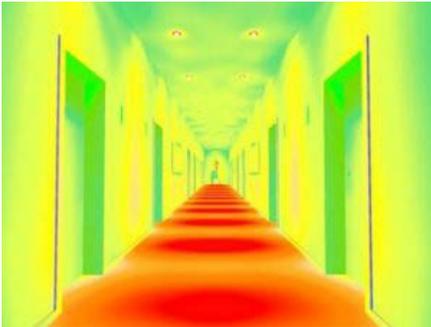

Brighter →

After The same hallway lit with 9 of Luminaire's HL110 15W Hallway Lights

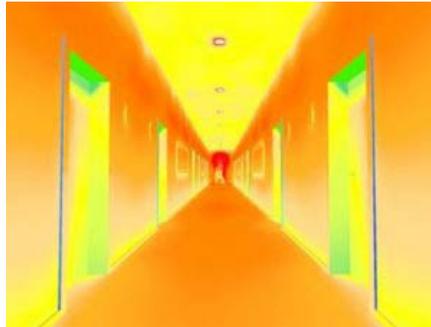

Brighter →




Light source
120-277V AC, 14W
Up to 1250lm @ 91lm/W

CCT/CRI
27K, 30K, 35K, 40K
CRI 90+

Finish

RECESSED WALLWASHERS


RWW160



40° tilt



The RWW160 is a compact (7 1/8" x 2 5/8") yet powerful recessed wall washer. A central pivot point allows tilting 40° in both directions with the ability to pull down below the ceiling plane for **easy adjustment** and **versatility**.



Light source
120-277V AC, 14W
Up to 1250lm @ 90 lm/W



CCT/CRI
27K, 30K, 35K, 40K
CRI 90+

Finish



Baffle



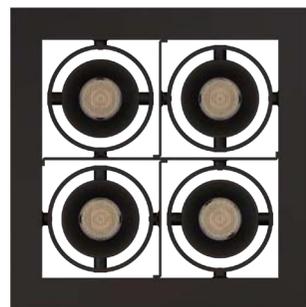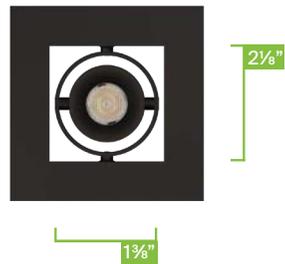

RECESSED MULTIPLES

a clean
& quiet
ceiling

With a discreet module **1 3/8" aperture**, knife-edge trim and excellent visual cutoff - Lumenture's RM35 redefines the recessed multiple. The diminutive recessed modules deliver a powerful **500 lumens each**, where you want it and without glare resulting in superior light quality with a "clean" and "quiet" ceiling. With up to 35° of tilt, the RM35 is a flexible lighting solution.




Light source

120-277V AC, 7W per head
Up to 1800lm @ 70 lm/W

CCT/CRI

27K, 30K, 35K, 40K
CRI 90+

Beam Spreads



15° 25°

Modules

1 Module, 2 Module, 3 Module,
4 Module, 4 Square Module


Finish



Lenses



RM65P

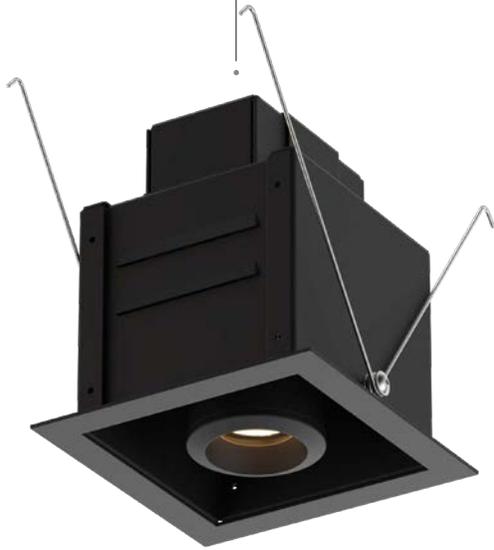

4 3/4"

2 1/2"

powerful
&
flexible

RECESSED MULTIPLES

Delivering up to 1600 lumens per head and a 2" pull-down feature, the RM65P is a lighting powerhouse, giving you maximum flexibility in any environment.




Light source

120-277V AC, 18W per head
Up to 6000lm @ 90 lm/W

CCT/CRI

22K, 24K, 27K, 30K, 35K, 40K
CRI 90+, 95+

Beam Spreads



15° 25° 40° 60°

Modules

1 Module, 2 Module, 3 Module,
4 Module, 4 Square Module

Finish



Lenses





RECESSED DOWNLIGHTS



Our **smallest downlight** yet, the DL35 has a discreet **1³/₈" aperture**, a knife-edge trim, and excellent visual cutoff. This diminutive fixture delivers a powerful 500 lumens where you want it and without glare. The result is **superior light quality** and both a “clean” and “quiet” ceiling.

This fixture is great for high-end residential, retail, above shelving, and anywhere you need a little extra light.

Light source

120-277V AC, 7W
Up to 500lm @ 70lm/W

Trim Type

Round (3" trim), Round Flangeless,
Square Flangeless

Beam Spreads



CCT/CRI

27K, 30K, 35K
CRI 90+

Finish



Louvers



Lenses



RECESSED DOWNLIGHTS



DL60
2"

With a **2" aperture**, knife-edge trim and excellent visual cutoff - Lumenture's DL60 blends discreetly into any environment. These recessed modules deliver high lumens without glare. The result is **superior brightness** and quality from an **unobtrusive fixture**.

The DL60 comes in **fixed (DL60)** and **adjustable (DLA60)** configurations and is available in both remodeler (with an attached junction box) or with optional rough-in housings to fit any construction need.



DL75
3"

Lumenture's DL75 downlight line has a **3" aperture**, knife-edge trim and **excellent visual cutoff**. Similar to our other downlight lines, the DL75 delivers high lumens without glare and integrates discreetly into any installation.

The DL75 is available in **fixed (DL75)**, **adjustable (DLA75)**, and wall washer (DLW75) configurations. It is also available both in remodeler (with an attached junction box) or with optional rough-in housings to **fit any construction need**.

Light source
120-277V AC, 6.5W-17W
Up to 1600lm @ 111lm/W

CCT/CRI
22K, 24K, 27K, 30K, 35K, 40K
Dim-to-Warm, CRI 90+, 95+

Beam Spreads
15° 25° 40° 60°

Trim Type
Round, Square, Round Flangeless, Square Flangeless, Pinhole, Adjustable

Finish

Louvers

Lenses

Light source
120-277V AC, 6.5W-17W
Up to 1600lm @ 111lm/W

CCT/CRI
22K, 27K, 30K, 35K, 40K
Dim-to-Warm, CRI 90+, 95+

Beam Spreads
15° 25° 40° 60°

Trim Type
Round, Square, Flangeless, Wet, Pinhole, Wall Washer


Finish

Louvers

Lenses




Cross-beam optics ensure a smooth beam and consistent lumen output—even at extreme aiming angles - eliminating any visible cut lines when tilted.

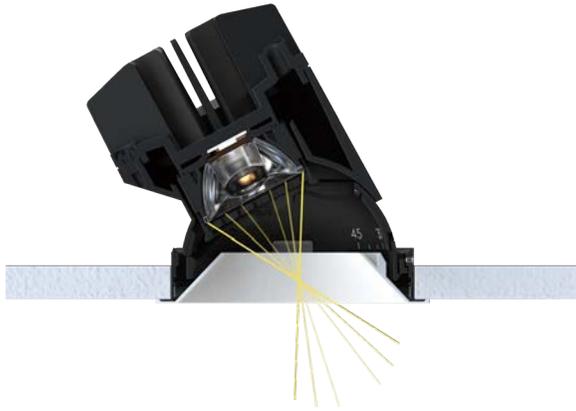

A patent-pending twist and pull accessory basket design allows for fast and easy optic and lens accessory modifications in the field.

A patent-pending innovative toolless touch slider makes it easy to see where you're aiming, when you're aiming. Degree markings at 5° increments ensure you're on target every time.

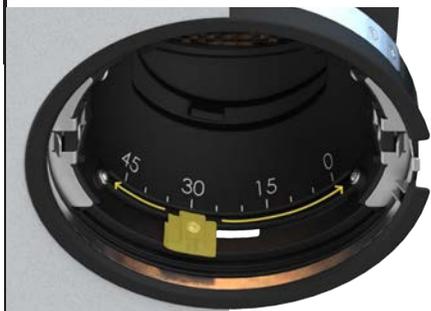

SDLA70 ADJUSTABLE

The first of its kind, Lumenture's SDLA70 Adjustable downlight sets a new standard in downlight design. Featuring patent-pending **toolless tilt adjustment** for smooth and precise aiming, a **symmetrical cut-free cone**, and an **intuitive accessory basket** for effortless optic and accessory modifications, the sphere delivers innovation with purpose on every project.




Light source

120-277V AC, 6.5W-17W
Up to 1400lm @ 82lm/W

CCT/CRI

22K, 27K, 30K, 35K, 40K
Dim-to-Warm, CRI 90+, 95+

Beam Spreads




Trim Type

Round, Square, Round Flangeless, Square Flangeless, Pinhole, Adjustable 45° tilt, 365° rotation

Finish



Louvers



Lenses




	Output	Housing	Trim Type	Aperture	Trim Width
	DL35 7W; up to 500lm	Pan (Non-IC-Rated options) Remodel (Non-IC-Rated)	Round, Square, Round Flangeless	1.4"	Knife-edge
	DL60 6.5-17W; up to 1600lm	Closed (IC-Rated) Open (Non-IC & IC-Rated options) Pan (Non-IC & IC-Rated options) Remodel (Non-IC & IC-Rated options) Chicago Plenum (IC-Rated options)	Round, Square, Round Flangeless, Square Flangeless, Wet, Pinhole	2.4"	Knife-edge X
	DLA60 6.5-17W; up to 1600lm	Closed (IC-Rated) Open (Non-IC & IC-Rated options) Pan (Non-IC & IC-Rated options) Remodel (Non-IC & IC-Rated options) Chicago Plenum (IC-Rated options)	Round, Square, Adjustable 40° tilt	2.4"	Knife-edge
	DL75 6.5-17W; up to 1600lm	Closed (IC-Rated) Open (Non-IC & IC-Rated options) Pan (Non-IC & IC-Rated options) Remodel (Non-IC & IC-Rated options) Chicago Plenum (IC-Rated options)	Round, Square, Round Flangeless, Square Flangeless, Wet, Pinhole	2.95"	Knife-edge
	DLA75 6.5-17W; up to 1600lm	Closed (IC-Rated) Open (Non-IC & IC-Rated options) Pan (Non-IC & IC-Rated options) Remodel (Non-IC & IC-Rated options) Chicago Plenum (IC-Rated options)	Round, Square, Round Flangeless, Square Flangeless, Adjustable 40° tilt	2.95"	Knife-edge
	DLW75 6.5-17W; up to 1600lm	Open (Non-IC & IC-Rated options) Pan (Non-IC & IC-Rated options) Closed (IC-Rated) Remodel (Non-IC & IC-Rated options)	Round, Square, Round Flangeless, Square Flangeless	2.95"	Knife-edge
	SDLA70 6.5-17W; up to 1400lm	Closed (IC-Rated, Chicago Plenum Rated) Closed Shallow Open (Non-IC & IC-Rated options) Pan (Non-IC & IC-Rated options) Remodel (Non-IC & IC-Rated options)	Round, Square, Round Flangeless, Square Flangeless, Pinhole, Adjustable 45° tilt, 365° rotation	2.90"	Knife-edge











LUMENTURE

Proudly Designed & Engineered
in the State of Connecticut

www.lumenture.com

482 Pepper Street, Monroe, CT 06468 - 203.864.3333 - team@lumenture.com