CONTRACTOR OF CONTRACT OF CONTRACT.

SPECIFICATIONS/FEATURES

Track

GTEK gives the ability to dim on two independent circuits without harmonics or interference on the neutral conductor.

Oversized conductors for operating safety and reduced overload potential.

Secure Bus Bar Insulation secured both conductors and insulation for the life of the product. Polarity ridge takes the guesswork out of connector and track alignment during installation.

Made of architectural grade extruded aluminum. Track can be field cut to desired length.

Compatibility


All Lumenture track fixtures must have a G-Series GTEK100 adapter installed to work with GTEK track.

Warranty


Please contact Lumenture to inquire about Nordic's warranty on this product.

Listing

cULus listed.



Recessed Track View Section



GFTP-xxx (Recessed Track Jacket Section)

ORDERING

PART #	TRACK FINISH	RECESSED TRACK JACKET SECTIONS (optional)	JACKET FINISH
	-	•	-
GTEK44 - 4' (48") Length 120V Track	B - Black	GFTP44 - 4' (48") Length; 511/2" Actual Length	B - Black
GTEK48 - 8' (96") Length 120V Track	W - White	GFTP48 - 8' (96") Length; 991/2" Actual Length	W - White
	G - Grey		G - Grey

ORDERING EXAMPLE:




See other pages for 120V Track Accessories.



C LUMENTURE www.lumenture.com version 20240710


PROJECT:

TYPE:

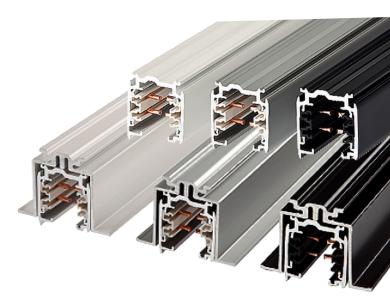

GTEK 2-CIRCUIT, 2-NEUTRAL 120V SERIES TRACK

TRACK INSTALLATION ACCESSORIES




Live End Feeds GTEK11 - (B, W, G) 120V Live End Feed. GTEK12 - (B, W, G) 120V Live End Feed, Reverse Polarity.



Track Length & Field Cutting Tool

GXTSV12


All-in-one hand tool, bends conductors to manufacturer specifications. Includes gauge to verify correct length.




Live Middle Feed GTEK14 - (B, W, G) 120V



Outlet Box Cover GES15 - (B, W, G)




Feedable L-Connector GTEK34 - (B, W, G) *120V* Adjustable Polarity.



Linear Coupler


GTEK21 - (B, W, G) *120V* Does not add length to track run.



Feedable X-Connector GTEK38 - (B, W, G) *120V*



Dead Ends GTEK41 - (B, W, G) 120V



Feedable T-Connectors GTEK39 - (B, W, G) 120V Adjustable Right Polarity. GTEK40 - (B, W, G) 120V Adjustable Left Polarity.

Adjustable Connector

GTEK24 - (B, W, G) 120V



Recessed End Cap GFTP41 - (B, W, G)

GF I P41 - (B, W, G) For safety, flush mounting applications.






GTEK 2-Circuit, 2-Neutral Track Specifications p. 2/3 Product specifications are subject to change info@lumenture.com **P.** 203.864.3333

GTEK 2-CIRCUIT, 2-NEUTRAL 120V SERIES TRACK

CEILING MOUNT ACCESSORIES



Mounting Clip GSKB12 - (B, W, G) For threaded rod or cable mount (rod/cable not included).

Ceiling Cup GSKB30 - (B, W) For threaded rod or cable mount (rod/cable not included).

Threaded Rod GSKB31 ¼" Dia., 6' Length. UNLook Finish.

5' Cable GSKB34

9' Cable GSKB34/3M Custom lengths as special order. UNLook Finish.



Mounting Clips GSKBX12 - (B, W) Deep Tile Mounting Clips.

GSKBT12 - (B, W, G) Mounting Clips for T-Bar Ceilings.



Stem Suspension Points GSP4P - (B, W)

Universal Suspension Point. Includes bracket and cover. Stem not included. Also works with cable and threaded rod suspension.


LUMENTURE


www.lumenture.com

version 20240710

TRACK DIMENSIONS AND CONFIGURATIONS

GTEK track is polarized and manufactured with identifying ridges (dotted lines on diagrams). Refer to these diagrams to ensure proper connector selection.

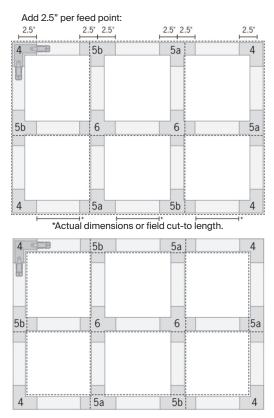

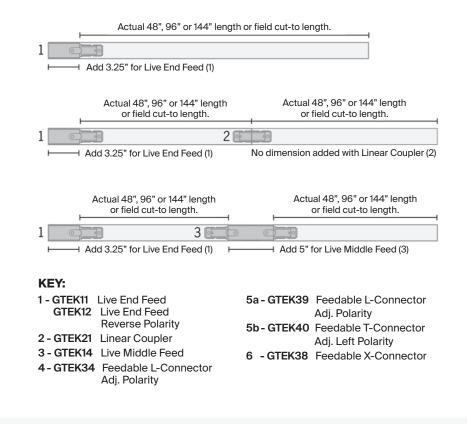

GTEK 2-Circuit, 2-Neutral Track Specifications p. 3/3 Product specifications are subject to change info@lumenture.com **P.** 203.864.3333