

LUMENTURE®

RWW160 RECESSED WALL WASHERS

Luminaire's RWW160 is a sleek recessed wall washer with an 1 1/16" wide lens. Featuring a centered pivot-point, the RWW160 can tilt 40 degrees in both directions, making it a versatile and easy-to-adjust fixture.

TYPE: _____

PROJECT: _____



						
DIMMING Triac, ELV	WEIGHT 24 oz.	WATTAGE 14W-1250lm	EFFICACY up to 89lm/W	AC DRIVER INPUT 120-277V	FINISH Extruded aluminum body, Powdercoat finish	MOVEMENT 40° tilt

ORDERING

FIXTURE	CCT/CRI*	BAFFLE COLOR	HOUSING TRIM COLOR	ACCESSORIES**
RWW160	27H - 2700K, CRI 90+ 30H - 3000K, CRI 90+ 30V - 3000K, CRI 90+, VividLight™ 35H - 3500K, CRI 90+ 40H - 4000K, CRI 90+	B - Black W - White	B - Black W - White *Integral housing is IC-Rated	B - Cross Baffle RP - Recessed Pan

*Custom options available, please consult factory.

**Please see page 3 for a full list of accessories.

ORDERING EXAMPLE:

RWW160 - 30H - W - W - B

LISTINGS

Certified to UL standard 1598 and CSA C22.2 No. 250.0-08 for damp locations.



RWW160 RECESSED WALL WASHERS

PHOTOMETRICS

LUMEN OUTPUT


Values fluctuate based on CCT and CRI. To estimate delivered lumen output of the various CCT/CRI options, multiply nominal lumens (1250 lumens) by the multiplier below.

CODE	CCT	CRI	TECHNOLOGY	MULTIPLIER
27H	2700K	90+	Standard	0.90
30H	3000K	90+	Standard	0.95
30V	3000K	90+	VividLight™	0.75*
35H	3500K	90+	Standard	1.00
40H	4000K	90+	Standard	1.00

Luminaire maintains a lumen output tolerance of +/-7.5%
 *VividLight™ perceived brightness is significantly higher than measured lumens.


RWW - Symmetric

Delivered Light Output: 1250 Lumens
 Total Watts @120V: 14;
 Lumens Per Watt: 94

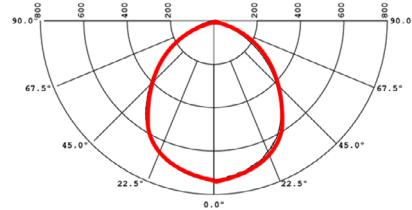


FOOTCANDLES ON WALL

Data for multiple units are based on a minimum of five units.



		6'									
		[Diagram]									
DISTANCE FROM CEILING (FEET)	0	13	14	14	14	14	14	14	14	14	14
	1	20	22	22	22	21	21	22	22	22	21
	2	23	24	25	24	24	24	24	25	25	23
	3	21	22	23	22	22	22	23	23	22	21
	4	17	18	19	19	19	19	19	19	18	17
	5	13	14	15	15	15	15	15	15	14	13
	6	11	11	12	12	12	12	12	12	11	10
	7	8	9	9	9	10	10	9	9	9	8
	8	6	7	7	7	7	7	7	7	7	6
	9	5	5	5	5	6	6	5	5	5	5

		4'									
		[Diagram]									
DISTANCE FROM CEILING (FEET)	0	18	19	20	21	21	21	21	21	20	19
	1	28	30	32	32	33	33	32	32	31	29
	2	32	34	35	37	37	37	36	36	34	32
	3	29	31	33	37	34	34	34	33	31	29
	4	24	26	27	28	29	29	28	28	27	25
	5	19	21	22	23	23	23	23	22	21	20
	6	15	16	17	18	18	18	18	17	16	15
	7	12	13	13	14	14	14	14	13	13	12
	8	9	10	10	11	11	11	11	10	10	9
	9	7	7	8	8	8	8	8	8	7	7






		6'									
		[Diagram]									
DISTANCE FROM CEILING (FEET)	0	19	21	19	15	12	11	14	18	21	20
	1	41	44	39	31	24	24	24	38	44	42
	2	40	42	39	33	28	28	33	39	43	40
	3	28	30	29	27	25	23	27	29	30	28
	4	19	20	20	21	19	19	20	20	21	19
	5	13	14	14	14	14	14	14	14	14	13
	6	9	10	10	10	10	10	10	10	10	9
	7	7	7	7	7	8	8	8	7	7	7
	8	5	5	5	5	6	6	6	5	5	5
	9	4	4	4	4	4	4	4	4	4	4

		4'									
		[Diagram]									
DISTANCE FROM CEILING (FEET)	0	24	23	21	23	26	26	24	22	23	24
	1	50	48	46	49	54	54	50	46	48	50
	2	50	49	50	52	55	55	52	50	50	50
	3	37	39	39	41	42	42	41	40	39	37
	4	26	27	29	30	30	30	29	29	28	26
	5	18	20	21	21	22	21	21	21	20	18
	6	13	14	15	15	15	15	15	15	14	13
	7	10	10	11	11	11	11	11	11	10	10
	8	7	7	8	8	8	8	8	8	7	7
	9	5	6	6	6	6	6	6	6	5	5



RWW160 RECESSED WALL WASHERS

DIMENSIONS

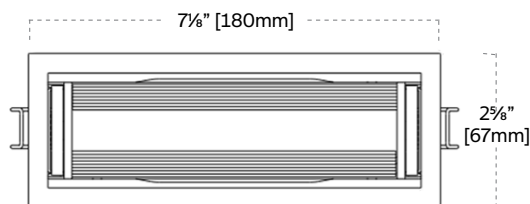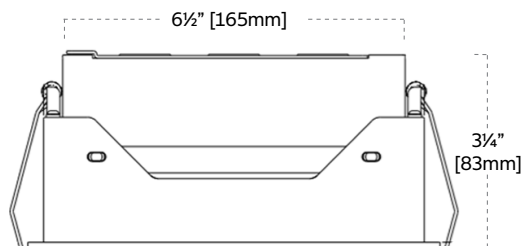

DIMENSIONS


RP (Recessed Pan)

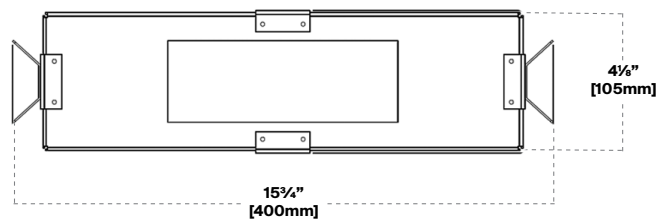

DIMMING

Dimming is standard and allows for smooth illumination below 5% with certain dimmers. Compatible with most triac (forward phase) and ELV (reverse phase) dimmers. For dimmer compatibility, refer to the Fixture Dimming Compatibility document on our website.

ACCESSORIES



RWW160-B
Black Cross Baffle