

LUMENTURE®

STUCCHI

THREE CIRCUIT, ONE NEUTRAL TRACK

TYPE: _____

PROJECT: _____

ABOUT STUCCHI TRACK

A three-circuit, one-neutral architectural-grade track system that provides power supply for Lumenture track lighting fixtures. With solid-copper conductors and a continuous mounting channel, Stucchi track can be installed in straight runs or configured in patterns using the track components and accessories.

FEATURES

- Extruded recycled aluminum and field cuttable housing
- Milled grounding bar provides continuous ground contact
- Three independent circuits, 120v, 20 amp max each
- Black, white or gray finishes available
- Surface or suspended mounting

WARRANTY

See manufacturer page for warranty information.

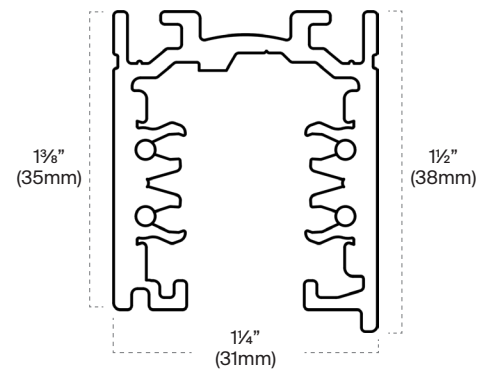
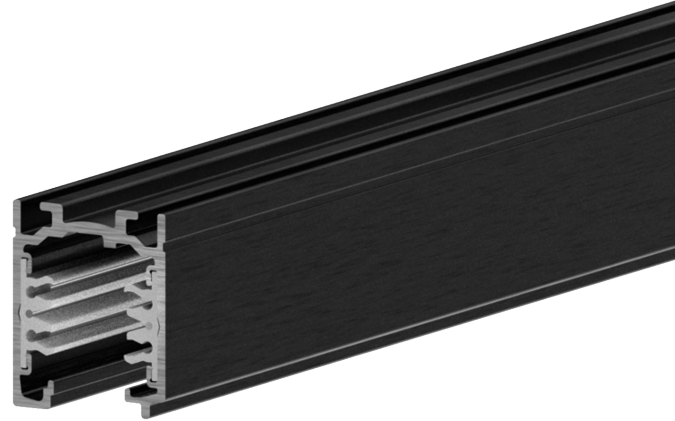
LISTINGS

All track and track components are cULus listed. Installations are suitable for damp and dry locations only.



FINISH OPTIONS

White, Black



Stucchi Track | Ordering

PRODUCT

1	2	3
---	---	---

ORDERING EXAMPLE: 9000 - UL4 - W - ST - 120

[1] TRACK LENGTH

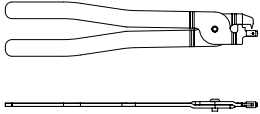

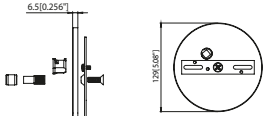

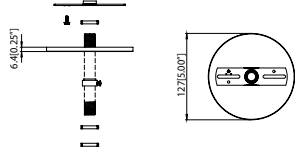


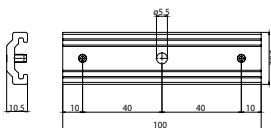
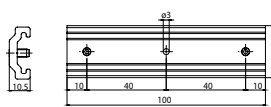
- ☐ 9000-UL4 4 ft track
- ☐ 9000-UL8 8 ft track
- ☐ 9000-UL12 12 ft track






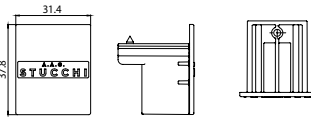
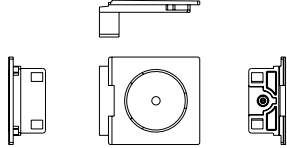



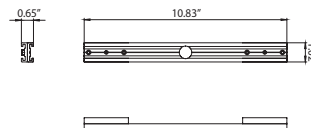
[2] FINISH

- ☐ W White
- ☐ B Black

[3] CIRCUIT

- ☐ ST-120 Stucchi three-circuit, one-neutral, 120V
- ☐ ST-277 Stucchi three-circuit, one-neutral, 277V

PART NUMBER	FINISH	VOLTAGE	DESCRIPTION	IMAGE	
S-9000/112-BT_	B Black W White	X none	Stem Bracket		
S-9000/T	X none	X none	Cutting tool for track conductors.		
9000-KIT3-_	B Black W White	X none	Kit includes screw gripper, plastic cap, steel cable, and bracket with automatic gripper.		
S-9000-P3-P-_UL-120	B Black W White	X none	Suspension set with feed includes counter-sunk CrossBar 1/4"-20, 5" Flat Canopy w/ 400 CH and .875" power-feed, cable.		
S-9000-P1-_UL	B Black W White	X none	Canopy Set J-Box crossbar, metal canopy and mounting bracket - stem to be ordered separately.		
S-9000-P2-_UL	B Black W White	X none	Canopy Set J-Box crossbar, metal canopy and mounting bracket.		
9000-SF/XX-_	B Black W White	X none	Painted metal stem. Available in 12", 18", 24", 36", and 48'		
S-9000/119-TB-_	B Black W White	X none	Painted bracket for fixing the track to the T-Bar.		
S-9000/322-LA-_	B Black W White	X none	Long pendant bracket for suspensions to be used when tracks are connected with a 9003 joint. To be used with S-9000/218 + SCREW-602/F)		
S-9000/322-SV-_	B Black W White	X none	Long pendant bracket for suspensions to be used when tracks are connected with a 9003 joint. To be used with steel cable with spherical end.		

PART NUMBER	FINISH	VOLTAGE	DESCRIPTION	IMAGE	
9001/_-3C-_	B Black W White	120 120 Volt 277 277 Volt	L-End feed polarity right/earthing left		
9001-CL/_-3C-_	B Black W White	120 120 Volt 277 277 Volt	End feed with Circuit Breaker Enclosure for 2-Circuit (Circuit Breaker not included).		
9001-CL-S/_-3C-_	B Black W White	120 120 Volt 277 277 Volt	Small end feed with Circuit Breaker Enclosure for 2-Circuit (Circuit Breaker not included).		
S-9001/SU-_	B Black W White	X none	Reinforcing Bracket for end feed		
9003/_	B Black W White	X none	Joining Connector		
9004/_	B Black W White	X none	End cap with locking screw.		
9004-CL-S/_	B Black W White	X none	End cap with locking screw (not mounted)		
9010/_-3C-_	B Black W White	120 120 Volt 277 277 Volt	Middle feed		
9010-CL/_-3C-_	B Black W White	120 120 Volt 277 277 Volt	Middle feed with Circuit Breaker Enclosure for 2-Circuit (Circuit Breaker not included).		
S-9010/SU-_	B Black W White	X none	Reinforcing bracket for middle feed		

PART NUMBER	FINISH	VOLTAGE	DESCRIPTION	IMAGE	
9011/_-3C_	B Black W White	120 120 Volt 277 277 Volt	L-feed polarity internal/earthing internal right		
S-9011/SU_-	B Black W White	X none	Reinforcing bracket for L-feed		
9013/_-3C_	B Black W White	120 120 Volt 277 277 Volt	T-feed polarity internal/earthing internal right		
S-9013/SU_-	B Black W White	X none	Reinforcing bracket for T-feed		
9014/_-3C_	B Black W White	120 120 Volt 277 277 Volt	T-feed polarity external right/earthing internal right		
9015/_-3C_	B Black W White	120 120 Volt 277 277 Volt	T-feed polarity internal left/earthing external right		
9016/_-3C_	B Black W White	120 120 Volt 277 277 Volt	T-feed polarity internal left/earthing external right		
9017/_-3C_	B Black W White	120 120 Volt 277 277 Volt	X-feed polarity internal/earthing internal right		
S-9017/SU_-	B Black W White	X none	Reinforcing bracket for X-feed		
9018/_-3C	B Black W White	X none	Adjustable corner		